

DATASHEET FOR SC1601A

The SC1601A is a 16 x 1 line standard size Character LCD with a built-in controller (HD44780 or Comp).

• FEATURES

<i>Number of Characters</i>	<i>16 characters x 1 line</i>
<i>Display Font</i>	<i>5 x 7 dots with Cursor</i>
<i>Built-in Controller</i>	<i>HD44780 or Comp</i>
<i>Input Data</i>	<i>4 Bits or 8-Bits Interface</i>
<i>Power Supply</i>	<i>+5 V Single Power</i>
<i>Duty Cycle</i>	<i>1/16 Duty</i>
<i>Options</i>	<i>EL/LED Backlight, TN/STN</i>

• MECHANICAL PARAMETERS

<i>Module Size</i>	<i>80.0W x 36.0H x 8.8T mm</i>
<i>Module Size with LED Backlight</i>	<i>80.0W x 36.0H x 12.7T mm</i>
<i>Viewing Area Size</i>	<i>66.0W x 16.0H mm</i>
<i>Dot Size</i>	<i>0.55 x 0.75 mm</i>
<i>Dot Pitch</i>	<i>0.63 x 0.83 mm</i>

• ABSOLUTE MAXIMUM

Item	Symbol	Min.	Max	Unit
Power Supply for Logic	Vdd	-0.3	+7.0	V
Power Supply for LCD Drive	Vlcd	Vdd-11.5	Vdd+0.3	V
Input Voltage	Vi	-0.3	Vdd+0.3	V
Operating Temperature	Ta	0	+50	C
Storage Temperature	Tstg	-10	+70	C

• ELECTRICAL CHARACTERISTICS


(Vdd=5.0V ± 5%, Ta=25°C)

Item	Symbol	Conditions	Min	Typ	Max	U
Power Supply for Logic	Vdd	-	4.5	--	5.5	V
Op. Voltage for LCD	Vdd-Vo	-	-	5.0	-	V
Input "High" Voltage	Vih	-	2.2	-	Vdd	V
Input "Low" Voltage	Vil	-	-0.3	-	0.6	V
Output "High" Voltage	Voh	- Ioh = 0.2mA	2.4	-	-	V
Output "Low" Voltage	Vol	Iol = 1.2mA	-	-	0.4	V
Power Supply Current	Idd	Vdd = 5.0V	-	1.0	3.0	mA

• PIN ASSIGNMENT

No.	Symbol	Level	Pin Description	Function
1	Vss	--	Ground	0V
2	Vdd	--	Supply Voltage for Logic	5V
3	Vo	--	LCD Contrast Adjust	By User
4	RS	H/L	Register Select	H: Data, L: Instruction Code
5	R/W	H/L	Read / Write	H: Data Read, L: Data Write
6	E	H, H→L	Enable	Enable Signal
7	DB0	H/L	Data Bit 0	8-Bit Interface
8	DB1	H/L	Data Bit 1	8-Bit Interface
9	DB2	H/L	Data Bit 2	8-Bit Interface
10	DB3	H/L	Data Bit 3	8-Bit Interface
11	DB4	H/L	Data Bit 4	4 or 8-Bit Interface
12	DB5	H/L	Data Bit 5	4 or 8-Bit Interface
13	DB6	H/L	Data Bit 6	4 or 8-Bit Interface
14	DB7	H/L	Data Bit 7	4 or 8-Bit Interface
15	A	--	LED Backlight	Power Supply for Backlight
16	K	--	LED Backlight	Power Supply for Backlight

• BLOCK DIAGRAM

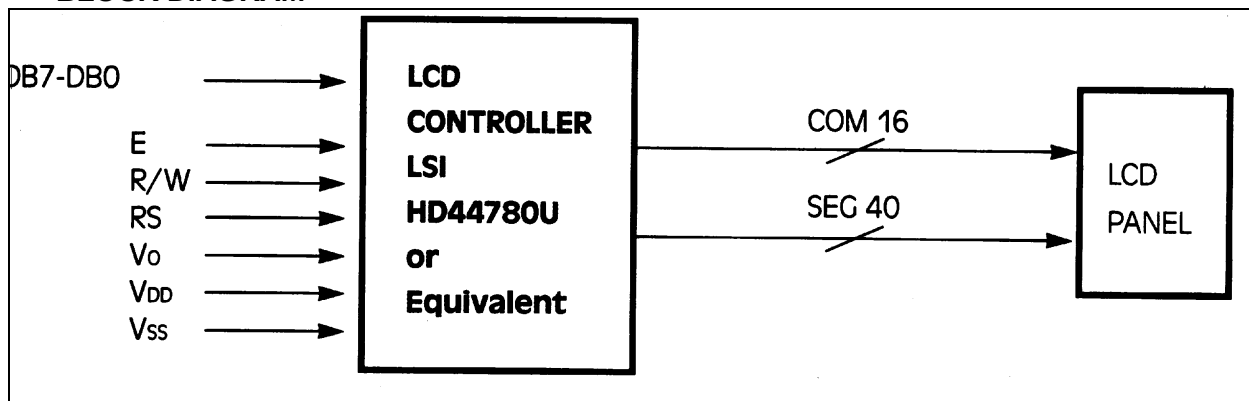

-
- Technical drawing of a rectangular electronic component, showing three views: top view, side view, and detail view.
- Top View Dimensions:**
- Overall width: 80.0 ± 0.5
 - Overall height: 36.0 ± 0.5
 - Pin pitch: $P2.54 * 16 = 38.1$
 - Pin diameter: $4 - \phi 2.5$
 - Pin array dimensions: 1.8 , 16 , $16 - \phi 1.0$
 - Mounting hole diameter: $4 - \phi 2.5$
 - Mounting hole spacing: 2.5 , 8.0
 - Internal dimensions: 25.2 , 16.0 , 6.56
 - Pin array dimensions: 59.62 , 66.0 , 71.2
 - Pin array dimensions: 10.16 , 2.5 (P2.54x4)
 - Pin array dimensions: 31.0 , 1.4 , $5 - \phi 1.0$
 - Pin array dimensions: 2.0
- Side View Dimensions:**
- Overall height: 6.56
 - Pin height: 1.6
 - Pin width: 4.8
 - Pin width: 8.8 (LED=12.7)
- Detail View Dimensions:**
- Pin width: 0.75
 - Pin width: 0.08
 - Pin width: 0.55
 - Pin width: 3.07
 - Pin width: 3.77
- Scale:** 4/1

- ENVIRONMENTAL CONDITIONS

Item	Operating		Non-Operating		Remarks
	Min	Max	Min	Max	
Ambient Temperature	0°C	50°C	-20°C	70°C	Normal Temperature Type
(Ta)	-20°C	70°C	-30°C	80°C	Extended Temperature Type
Vibration	--	0.5G	--	2G	G=9.8 m/s ²
Shock	--	3G	--	50G	XYZ Directions
Corrosion Gas	No Corrosion Gas				

- OPTICAL CHARACTERISTICS

TN TYPE

Item	Symbol	Condition	Min	Typ	Max	Unit
Viewing Angle	Ø2-Ø1	K=1.4	20	--	--	Deg
Contrast Ratio	K	Ø=25° θ=0°	--	3	--	--
Response Time (Rise)	tr	Ø=25° θ=0°	--	200	250	ms
Response Time (Fall)	tf	Ø=25° θ=0°	--	200	300	ms

STN TYPE

Item	Symbol	Condition	Min	Typ	Max	Unit
Viewing Angle	Ø2-Ø1	K=1.4	40	--	--	Deg
Contrast Ratio	K	Ø=25° θ=0°	3	--	--	--
Response Time (Rise)	tr	Ø=25° θ=0°	--	200	300	ms
Response Time (Fall)	tf	Ø=25° θ=0°	--	250	350	ms

- **BACKLIGHT CHARASTERISTICS**


EL BACKLIGHT

Luminous Intensity : 60 cd/m²

Power Consumption : ~0.17 mA/cm²

Driving Condition : 150 Vrms AC Max 50~1000 Hz

Life : 2K Hours (Normal Type), 8K Hours (Long Life Type)

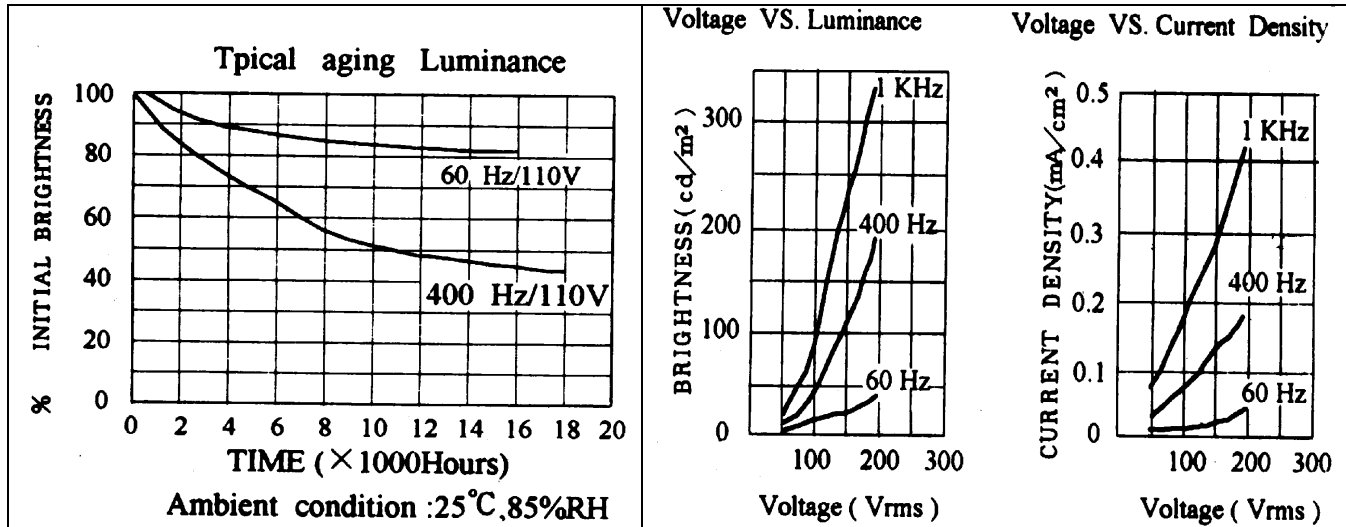


LED BACKLIGHT

Low Voltage Driving (DC) is available without invertor

No noise occurrence

Luminous Intensity : 50 cd/m²

Life : 20K Hours

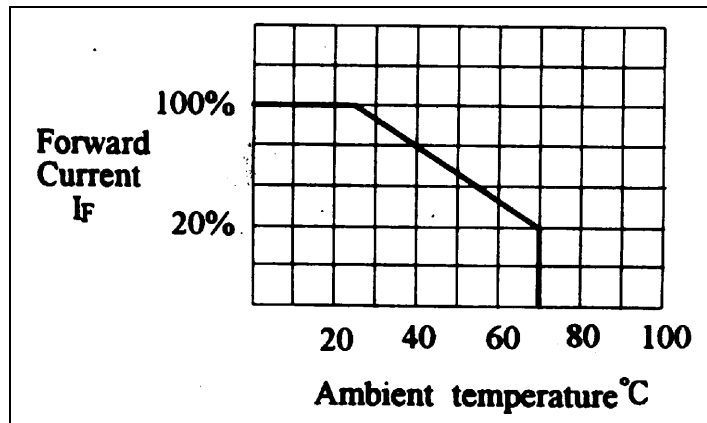

• AC CHARACTERISTICS

Item		Symbol	Min	Max	Unit
Enable Cycle Time		T_{CYCE}	500	--	ns
Enable Pulse Width	High Level	PW_{EH}	230	--	ns
Enable Rise/Fall Time		t_{Er}, t_{Ef}	--	20	ns
Address Set-up Time	RS, R/W to E	t_{AS}	40	--	ns
Address Hold Time		t_{AH}	10	--	ns
Data Set-up Time		t_{DSW}	80	--	ns
Data Delay Time		t_{DDR}	--	160	ns
Data Hold Time (Writing)		t_H	10	--	ns
Data Hold Time (Reading)		t_{DHR}	5	--	ns
Clock Oscillation Frequency		f_{OSC}	270 (TYP)		KHz

• TIMING CHARACTERISTICS

